

ESTA OMEGA

Super Corona

Electrostatic Powder Coating

NEW

Deep Corners on work pieces

Omega finishing system are offering their extensive range of electrostatic powder coating equipment. As well as various supply of manual units. Full automatic system completed with auto gun, electronic reciprocator, control cabinets and powder recycling equipment:


Easy and fast application.

Flat works pieces: Homogeneous and even film thickness.

Automatic Application: High efficiency

Touch up and second layer application: Without any problem.

Quality of the coating perfect result

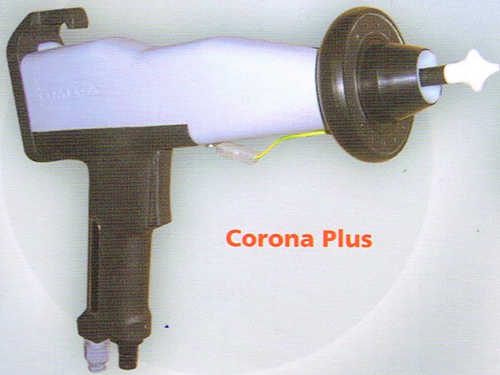

Corona Plus



Flat Spray



ESTA OMEGA

TOZ VE YAŞ ELEKTROSTATİK BOYA CİHAZLARI
VE KOMPLE BOYAMA TESİSLERİ
Tel: 0212. 222 40 06 Pbx - Fax: 0212. 220 24 07
E-mail: omegasistem.net.tr
http://www.omegatesis.com.tr

Technical Characteristics

CRN - 410 Control Box

Electricity	220 V / 50 Hz
Protection Class	IP-54
European Standart	EN-50050
Powder Output	5-30 kg/hour
Inlet Air Pressure	5 Bar (max)
Air Inlet Hose	8 mm (inside)
Air Consumption	350 lt / min (21 nm ³ /hour)
Air Quality	Oil 0,1 ppm (max) Humidity 1,3 g/m ³ (max)

Omega TRN - 110 Gun

Model	TRN-110
Voltage	100 KV
Max. Current	80 µA
Charging Polarity	Negative
Cable Lenght	5,5 m
Powder Hose Lenght	5,5 m
Weight	640 g
Lenght	350 mm

Model	Powder Gun TRN-110	Control Module CRN-410	Injector	Powder Hopper (35 lt) BD
OM-TRN-110	✓	✓	✓	
OM-TRN-110BD	✓	✓	✓	✓

Nozzles	Nozzle End	Work Pieces
Round Spray Nozzle (Standart)	16 mm Small Deflector 20 mm Medium Deflector 24 mm Big Deflector	Suitable for all type of parts
Flat Spray (Standard)	One type	Deep parts
Corona Plus (Standard)	One type	Faraday Cages



TEKNİK MAKİNA SAN. VE TİC. A.Ş.



Halil Rifat Paşa Mah. Aydınlıktepe Sok. No:14,
34384 Okmeydanı - İstanbul / Turkey

Phone: (0212) 222 40 06 (pbx) Fax: (0212) 220 24 07

e-mail: estaomega@estaomega.com.tr Web site: www.estaomega.com.tr

Aproved Distributor